



PUNTO FOUR RANGE

Wall axial fans


For intermittent or continuous ventilation of bathrooms, toilets, kitchens or utility rooms in domestic or commercial properties.



- **6 models:** from 90 to 120 diameters, with or without timer.
- Body made of ABS plastic anti-UV.
- Integral backdraught shutter.
- Timer models adjustable between 3 and 20 minutes.
- Standard models can be speed regulated.
- Easy to clean and to maintain.
- Ceiling installation and wall installation.
- Protection rating: IPX4.
- Insulation class: II. □

Wiring diagrams shown from page 458


Design: F. Trabucco & Associates

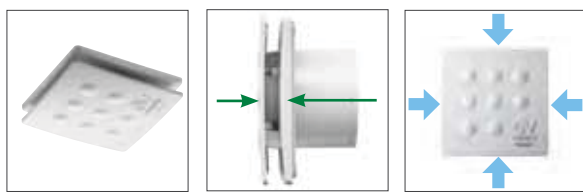

TECHNICAL DATA

Models	Code		V-50Hz	W	A	RPM	Max Airflow		Max Pressure		Lp dB(A) 3m	Max °C
	BASIC	TIMER					m³/h	l/s	mmH₂O	Pa		
MFO 90/3.5"	11143	11144	230 - 240	14	0.08	2540	65	18	2.5	25	29.6	50
MFO 100/4"	11145	11146		15	0.09	2400	85	24	3	29	33.1	
MFO 120/5"	11147	11148		20	0.12	2240	175	49	5	49	39.1	

DIMENSIONS

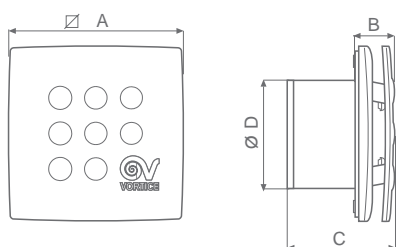




Models	∅ A	B	C	∅ D	Kg
MFO 90/3.5"	158	37	97	92.4	0.50
MFO 100/4"				98.4	0.52
MFO 120/5"	178	42.3	114	118.9	0.70

Dimensions (mm)






PRODUCT ACCESSORIES

Models	Code	Product					
		MFO 90/3.5" code 11143	MFO 90/3.5" T code 11144	MFO 100/4" code 11145	MFO 100/4" T code 11146	MFO 120/5" code 11147	MFO 9120/5" T code 11148
 C 1.5 Electronic speed controller 1.5 A	12966	●		●		●	
 SCB KIT Built-in controller adaptor for C 1.5	22481	12966					
 SF 90-100 Ceiling kit Ø 90-100	22162	●	●	●	●		
SF 120 Ceiling kit Ø 120	22163					●	●

Description and sizes on page 126; System components on page 330.

PERFORMANCE CURVES

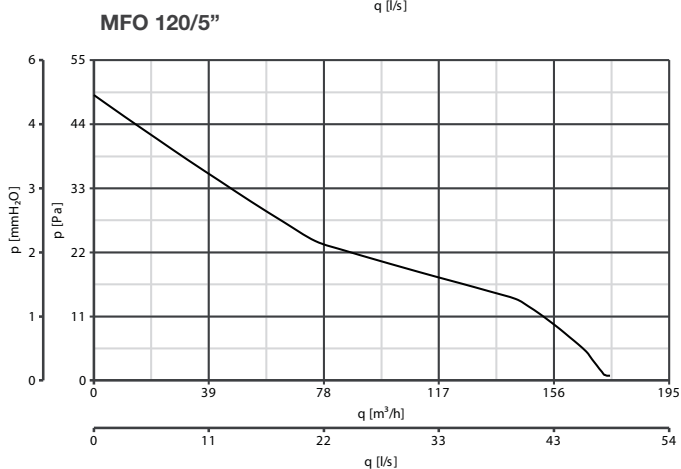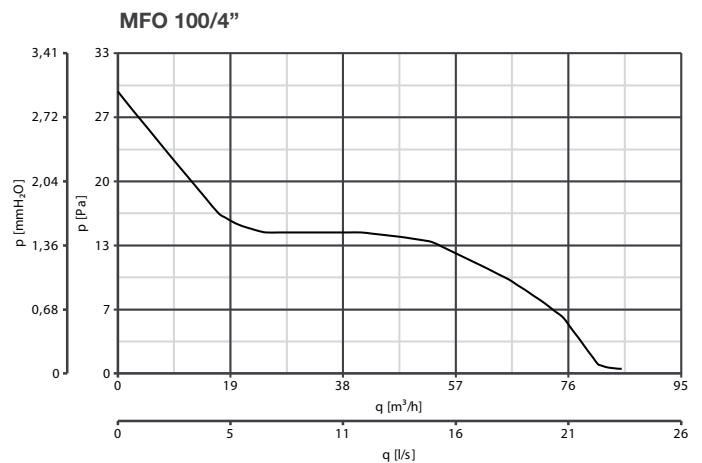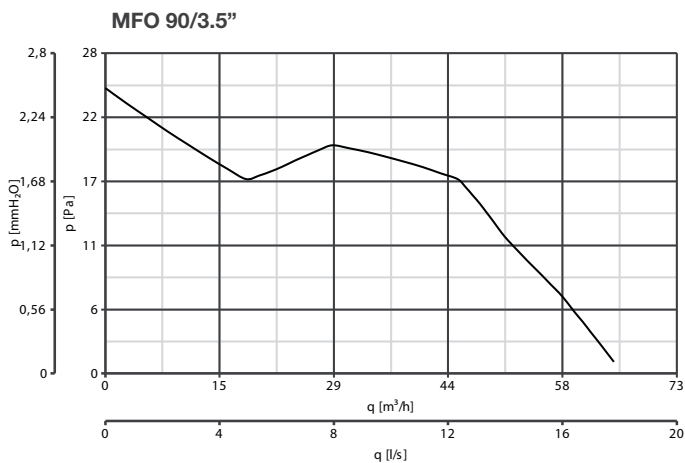

— static pressure



KOVENT
 Kumanovska 14, 11000 Beograd
 Tel. 011 308 57 40
 Faks 011 344 41 13
 E-mail: office@kovent.rs
 www.kovent.rs